


WuduMate



CSA Certification No: 301439

Accessories/Options

- 1.8 lpm aerator
- Thermostatic Mixing Valve
- Wrist Blade (shown)
- 1/2" BSP to 3/4" NPS Adapter

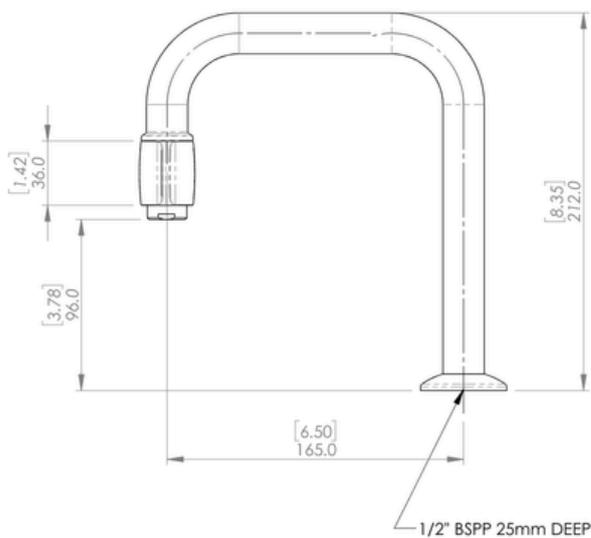

All measurements in (metric) & imperial

The information in this specification sheet reflects the current technical specifications at the time of print. We reserve the right to change the technical or physical specifications without prior notice. All WuduMate images and symbols are exclusive property of Specialist Washing Co. Specialist Washing Co. accept no liability for loss or damage caused by improper installation. Any reproduction or retransmission or republication of any part of this specification sheet is strictly prohibited, unless prior written permission has been granted by Specialist Washing Co, E&OE.

WuduMate LEAD FREE PILLAR TAP 180

Product Code WM-T-PIL-180-SQ-LF

High quality, lead free pillar tap designed for use with the WuduMate Compact, WuduBasin, and/or the WuduMate Classic, with a pre-mixed water supply and TMV (Thermostatic Mixing Valve). When the WuduMate Pillar Tap is installed with any of these models, the spout is in the most comfortable position for wudu, the Muslim pre-prayer washing ritual, and at the right angle to minimise splashing. This means that the floor remains dry and therefore safe, and that grey water is not splashed back onto the person performing wudu, something which would invalidate the wudu ritual.

Suitable settings include multi-faith rooms in commercial, civic or educational buildings and mosques.

This tap has both Australian WaterMark certification, and CSA certification, (issued by the Canadian Standards Association). CSA certification is a North American quality standard recognised worldwide, providing the purchaser with peace of mind about manufacturers' labour practices as well as product safety, quality and longevity.

Colour Silver

Material Chromed Lead-Free Brass certified as containing <0.005% lead (Lead Free Materials Certificate H63-HV110-150)

Weight Net: (0.6kg) 1.32lbs Gross: (0.7kg) 1.54lbs

Carton Size mm: (290 x 210x 50) inches: 11.42 x 8.27 x 1.97

Special Notes The 3.7 litres per minute, pressure equalising Neoperl aerator (Perlator Honeycomb PLHC 40.2058.00002), with WRAS approved cartridge, saves water and reduces splashing. The WuduMate Pillar Tap is operated by an easy to use and comfortable quarter-turn control mechanism at the end of the spout.

Alternative WuduMate Models WuduMate Manual Lever Pillar Tap, WuduMate Pillar Tap 120, Auto-Sensor Tap



APPROVAL N° 2106332



CSA CERTIFICATION 301439

